# Eco-Salt

SC Max Commercial Series





## SC Max Commercial Series

### **Automatic Salt Water Chlorination System**


#### **Application**

Eco-Salt SC Max Salt Water Chlorination Systems are the natural choice for a clear, sparkling swimming pool. Incorporating high flow, long life electrodes with a robust heavy duty power supply, the Eco-Salt SC Max Chlorinator is built to provide many years of trouble free service for your swimming pool. Utilising the highest quality materials available, the system is complete with resilient powder coated cabinet and UV resistant Cell Electrode Housing. The SC Max is very economical and simple to operate and equipped with over load protection. Cell Output is displayed clearly utilising a number of LEDs as is the Cell Overload, Low Salt level and Flow Indicators. Eco-Salt SC Max Salt Water Chlorination Systems are available in a range of models for all pool shapes and sizes and are suitable for use on all pool surfaces.

No more handling of chlorine! Eco-Salt SC Max Salt Water Chlorination Systems take the hassle out of sanitising your swimming pool water. Eco-Salt SC Max requires the addition of natural salt to your swimming pool at a rate of 3000ppm or 0.3% making

the water softer and more buoyant to swim in. The water is only one-ninth as salty as water from the ocean! This mild salt water is electrolysed via the Heavy Duty Electrolytic Cell to automatically sanitise the water in your swimming pool.

Eco-Salt SC Max for small to medium Public, Resort, Hotel and School Swimming Pools

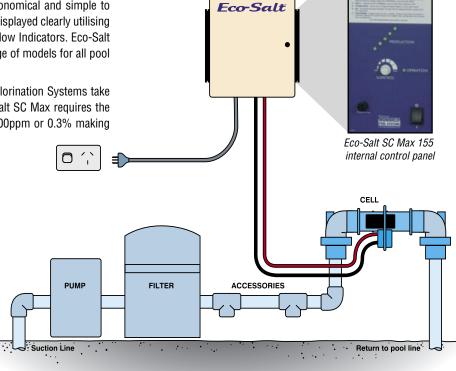

**Power Supply** 

#### Features & Advantages

- · Large High Flow Rate Cell Housing
- · Heavy Duty Electrolytic Self Cleaning Cell
- 2" or 3" inlet and outlet
- · Powder Coated 230volt Power Supply
- LED display of Cell Production/Low Salt/Flow and Overload Indicators
- Variable Cell Production Control utilising Time Frequency Technology, from 10% to 100% output
- · Lockable Power Supply cabinet on Model 155

#### Technical Information

Model	Output (65% Equivalent Granular chlorine)	Output (100% Chlorine)	Power (KwH)
<del>77*</del>	77 gph	50 gph	0.4
155	155 aph	100 aph	0.8

<sup>\*</sup>Alternate Power Supply enclosure utilised for SC Max 77 Model

Filtration Timer optional on model 77. Suitable for commercial pools with moderate bathing loads and smaller water volume. Commercial Pools with high bather load and medium to high water volume please refer to Monarch Pool Systems COMM series with output from 120 gph to 550 gph.





MANUFACTURERS AND DISTRIBUTORS OF HIGH QUALITY POOL & SPA EQUIPMENT

WA: 18 Catalano Road Canning Vale WA 6155
NSW: 16 Centenary Avenue Moorebank NSW 2170
QLD: 76 Northlink Place, Virginia QLD 4014
VIC: 6A Brough Street, Springvale VIC 3171

6A Brough Street, Springvale VIC 3171 Unit 3, 4 Cord Street, Dudley Park, SA 5008 Phone: (02) **9824 3724** Phone: (07) **3266 4711** Phone: (03) **9546 4937** Phone: (08) **8342 6205** 

Phone: (08) 9256 3555

Fax: (08) **9256 3777** Fax: (02) **9601 8621** Fax: (07) **3266 4722** 

ne: (03) **9546 4937** Fax: (03) **9546 8127** ne: (08) **8342 6205** Fax: (08) **8342 6574** 

NEB: www.monarchpoolsystems.com EMAIL: info@monarchpoolsystems.com

WHOLLY AUSTRALIAN FAMILY OWNED AND OPERATED

SA: