

Wall Mounted Lamp Installation Instruction




PLEASE READ THE FOLLOWING CAREFULLY AND
KEEP THIS USER MANUAL SAVE FOR FUTURE REFERENCE

DESCRIPTION	
ITEM NO.	W2003V-S513RGB
POWER	40W
VOLTAGE	DC 12V
COLOR	RGB
CONTROL	WiFi Control
LUM.	1700LM
LED TYPE	SMD2835 [513pcs]


IP68    **RoHS**

DIMENSION

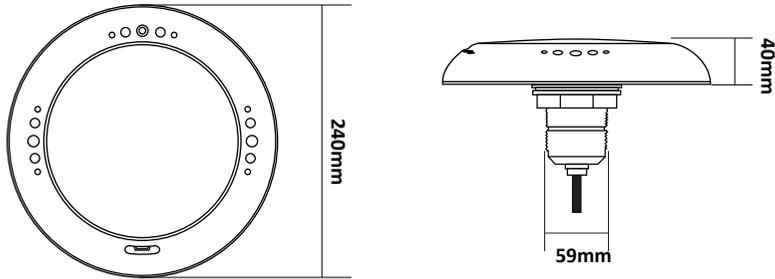

INSTALLATION

1. Input voltage is DC12V. The lamps must be connected with transformer.
2. The junction box is located at least 1200mm from the edge of the pool. The light's lens is at least 450mm below the water level in the pool.

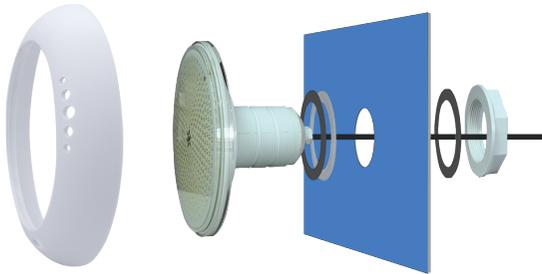

3. If the cable connection is done underwater, the connection part must be **waterproof protected** (use waterproof cable gland or fill with epoxy glue). Otherwise, the water will come in the lamp through the wires.



4. Connect all wires to the corresponding circuit wires in the junction box and feed epoxy.
5. Before operating the light for more than 10 seconds fill pool until the light is completely submerged in water.

2



Output Connector

- 1) Support Android system and IOS system
- 2) Remote control LED lights by App (Proteam Magic Pool) at anywhere
- 3) Support timing function; set schedule to switch on/off lights
- 4) Light color change with the rhythm of music in your smart device
- 5) Work with Amazon Alexa, control your lights by voice



- Brown Wire : R-
- Blue Wire : B-
- Green/Yellow Wire : G-
- Black Wire : V+



The RGB lights which connected with the Wifi Control box must be 4 wires, DC12V

3